


Specification:

- housing made of galvanized or stainless steel
- holder in the housing for the pump adapter made of stainless steel with AISI 304 and engraving
- stainless steel (AISI 304) electropolished small bike rack
- 2 x stainless steel (AISI 304) electropolished tool containers
- powder painting
- tools on stainless steel lines fi 4 mm
 - PH2 Phillips screwdriver with integrated swivel, AISI 304/420 stainless steel+nickel-plated
 - flat screwdriver (5.5 mm) with integrated swivel, AISI 304/420 stainless steel+nickel-plated
 - adjustable wrench (0-36 mm), AISI 420 stainless steel + nickel-plated
 - HEX + TORX (2-in-1) wrench with integrated swivel, AISI 316/420 stainless steel+nickel-plated
 - tire levers nylon-coated with AISI 420 stainless steel core x 2 pcs.
 - double-chamber pump adapter - AISI 630 stainless steel + nickel-plated for all types of bicycle valves (Presta, Schrader and Dunlop) with industrial-grade AISI 304 components (IBOMBOAISIPRO 630 HEAD™) + reinforced hydraulic hose 1/4" (225 BAR)
 - manual stationary bicycle pump max. 10 bar:
 - thick piston made of stainless steel AISI304 fi 14 mm
 - stainless steel pump handle fi 32 mm
 - anodized aluminum sealant (PA6)
 - antifog pressure gauge with glycerin
- mounting kit (4 x M10 anchors, 75 mm)
- anti-theft nuts for the base of the station with a patent key
- anti-theft screws securing the element of the station with service bits
- possibility to mount up to 6 tools
- branding of the front and two walls of the station with foil and laminate
 - 4 x 10,5 x 54 cm

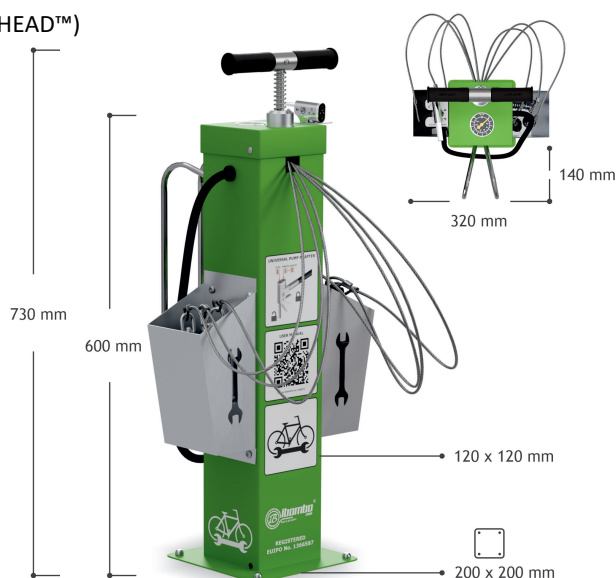

Self-Service Bike Repair Station is adapted for use in public space. Its housing is **made of galvanized/stainless steel, powder coated**. The device is mounted to the ground or walls with anchors. **Aircraft cables (7x7 strand construction, Ø 4 mm) made of marine-grade AISI 316 stainless hsteel**, extending from inside the device, are used to secure tools made of stainless steel alloys (AISI 304/AISI 316/AISI 420). Their length allows access to certain bicycle components. **Swivels** allow for better comfort of use when adjusting with screwdrivers or allen keys. The station is equipped with a manual air pump with a **thick piston** made of stainless steel AISI304 fi 14 mm and an **antifog manometer with glycerin**. Double chamber pump adapter made of stainless steel AISI630 + nickel-plated for all types of bicycle valves (Presta, Schrader and Dunlop) with industrial grade AISI304 stainless steel internals. The **QR CODE** located on the front of the station allows the use online publications containing instructions for repairing bicycle faults. The device is equipped with **two stainless steel (AISI304) tool containers** with a key mark lasered on both sides. An additional convenience is a **stainless steel stand (AISI304)** that fits most bicycle tires, which stabilizes the bike when inflating tires or adjusting the bike. The sheet metal components in the device are connected by **anti-theft screws**.

IBOMBO sp. z o.o.

Strzyżewice, ul. Modelarska 9a, 64-100 Leszno, POLAND

KRS: 0000923409, NIP: 6972383411, REGON: 520012450

biuro@ibombo.com | www.ibombo.com | +48 730-070-730

